

Paywire Epic Configuration Guide

V1.12.2

- Notice: You can initialize as many times as you want, but **Send Transaction Request** must be clicked within 5 seconds after **Send Initialize** is clicked. Resend initialize is required if after 5 seconds.

Epic Emulator

Assembly: Type Name:

Is Test Account?

Configuration

Name	Value
e_gatewayidentifier1	xxxxxxxxxx
e_gatewayidentifier2	xxxxxxxxxx
e_gatewayidentifier3	xxxxxxxxxx
e_gatewayidentifier4	xxxxxxxxxx

Request:

Response:

Transaction Type: Amount:

Allow Partial Pmt?: Token Requested?:

Line Items


Description	Amount
*	

Request:

Response:

2. Paywire Test App

- The test app (**pwIngenicoTestApp.exe**) in C:\Program Files(x86)\Epic\v8.1\Shared Files\pwTestApp , which can be published to client machine for card reader connection test.

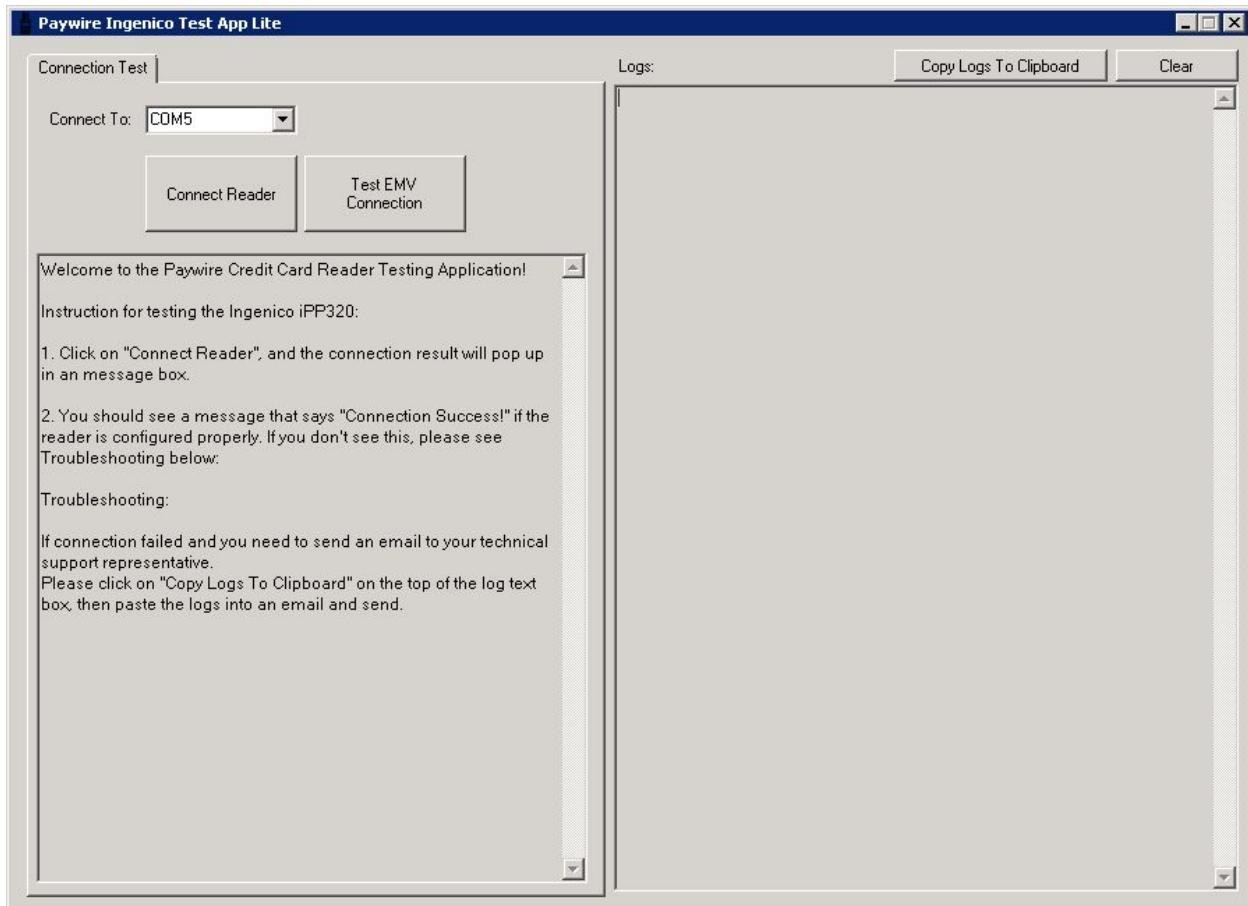

Client Side Configuration

Integration:

- Make sure Paywire Receiver is showing at System tray.
- Right click on the icon and click on “Preferences...”, confirm Citrix Service is checked.
- Do not use the **Update** button unless instructed by Paywire Team.

